NORMALUX

Technical datasheet

LISSA

Emergency Lighting

Ref. LNEAL3-300

LED

EN 60598-1, EN 60598-2-22
230V 50/60HZ

Emergency Lighting: LISSA. Reference: LNEAL3-300, manufactured by Normalux. Lumens 254 lm. Autonomy (h) 3h. Operating mode: Mantained - Non Maintained. Installation: Recessed Mounting. Light source: Led. Battery of: Ni-MH 3,6V/2700mAh. IP: 20. IK: 08. Version: Self-test. Color: White. Casing: . Voltage: 230V 50/60Hz. Dimensions (mm): 503 x 65 x 105 mm. Manufactured according EN 60598-1, EN 60598-2-22 regulations.

Lumens	254 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	3h
Battery	Ni-MH 3,6V/2700mAh
Power (W)	4,5W
Operating mode	Mantained - Non Maintained
Class	I
IP	20
IK	08
Operating temperature (ºC)	5 to 35
Remote control	No

Dimensions (mm):

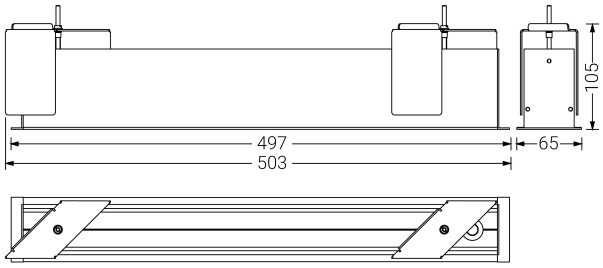

Photometric data:

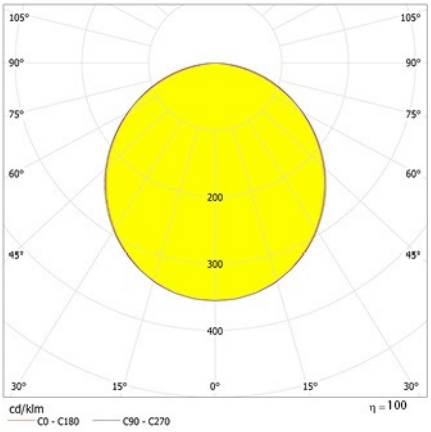

Parque tecnológico de Asturias. Calle Ablanal 1, 33428 Llanera (Asturias), Spain
T. +34 985 267 100 F. +34 985 266 992
normagrup@normagrup.com
www.normalux.com

Normagrup
Sense of Technology