NORMALUX

Technical datasheet

DOPPLO

Emergency Lighting

Ref. DO-1100L

LED CE

UNE 60598-2-22
230V 50/60HZ

Emergency Lighting: DOPPLO. Reference: DO-1100L, manufactured by Normalux. Lumens 1040 lm. Autonomy (h) 1h. Operating mode: Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Pb 6V/4,5Ah. IP: 65. IK: 07. Version: Standard. Color: Grey. Casing: Polycarbonate. Voltage: 230V 50/60Hz. Dimensions (mm): 370 x 243 x 191 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

Lumens	1040 lm
Color temperatures (K)	4000
Light source	Led
Autonomy (h)	1h
Battery	Pb 6V/4,5Ah
Power (W)	0,3W
Operating mode	Non Maintained
Class	II
IP	65
IK	07
Operating temperature (ºC)	5 to 35
Remote control	Yes

Dimensions (mm):

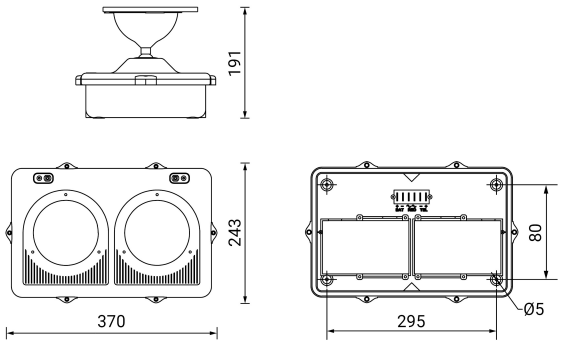

Photometric data:

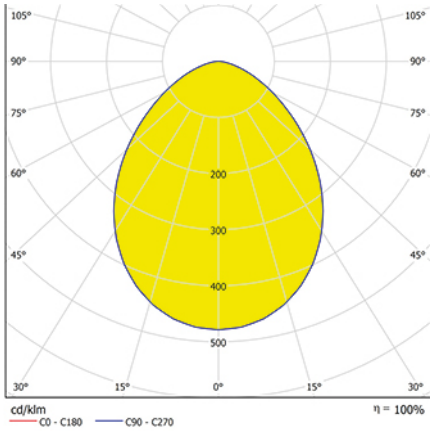

Unit 6 Quartz Close. B5K Business Park.
Amington. Tamworth. B77 4GR, England
T. 01827 816333
normagrup@normagrup.uk
www.normalux.com

Normagrup
Sense of Technology