NORMALUX

Technical datasheet

DOPPLO

Emergency Lighting

Ref. DOIDL-1900

LED CE

UNE 60598-2-22
230V 50/60HZ

Emergency Lighting: DOPPLO. Reference: DOIDL-1900, manufactured by Normalux. Lumens 1800 lm. Autonomy (h) 1h. Operating mode: Mantained - Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Pb 12V/4,5Ah. IP: 65. IK: 07. Version: DALI. Color: Grey. Casing: Polycarbonate. Voltage: 230V 50/60Hz. Dimensions (mm): 370 x 243 x 191 mm. Manufactured according UNE 60598-2-22 regulations.

Lumens	1800 lm
Color temperatures (K)	4000
Light source	Led
Autonomy (h)	1h
Battery	Pb 12V/4,5Ah
Power (W)	17W
Operating mode	Mantained - Non Maintained
Class	II
IP	65
IK	07
Remote control	Yes

Dimensions (mm):

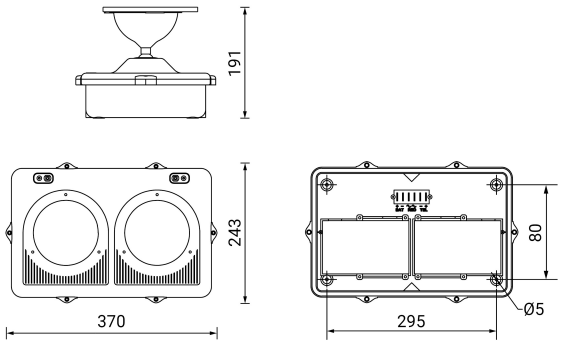

Photometric data:

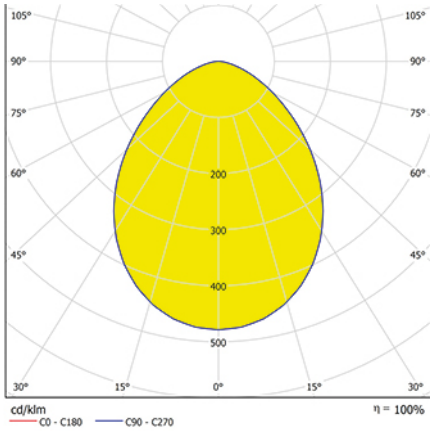

Unit 6 Quartz Close. B5K Business Park.
Amington. Tamworth. B77 4GR, England
T. 01827 816333
normagrup@normagrup.uk
www.normalux.com

Normagrup
Sense of Technology