

GS

Emergency Lighting

Ref. GA3-200L




UNE 60598-2-22
230V 50/60HZ

Emergency Lighting: GS. Reference: GA3-200L, manufactured by Normalux. Lumens 195 lm. Autonomy (h) 3h. Operating mode: Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Ni-Cd 7,2V/750mAh. IP: 44. IK: 07. Version: Self-test. Color: White. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50/60Hz. Dimensions (mm): 252 x 100 x 40 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

Lumens	195 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	3h
Battery	Ni-Cd 7,2V/750mAh
Power (W)	1W
Operating mode	Non Maintained
Class	II
IP	44
IK	07
Operating temperature (°C)	5 to 35

Photometric data:

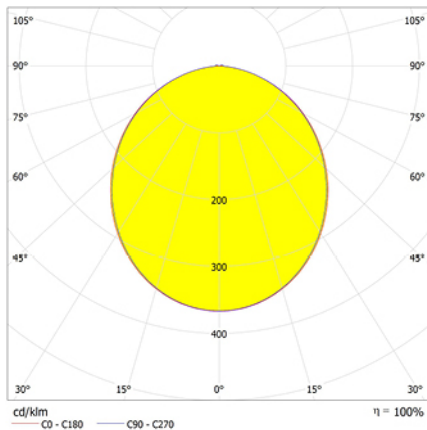

Dimensions (mm):

