NORMALUX

Technical datasheet

GENNIUS

Emergency Lighting

Ref. GEAL3-100

LED CE

UNE 60598-2-22
230V 50/60HZ

Emergency Lighting: GENNIUS. Reference: GEAL3-100, manufactured by Normalux. Lumens 100 lm. Autonomy (h) 3h. Operating mode: Mantained - Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Ni-Cd 4.8V/750mAh. IP: 68. IK: 09. Version: Self-test. Color: White. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50/60Hz. Dimensions (mm): 313 x 160 x 59 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

Lumens	100 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	3h
Battery	Ni-Cd 4.8V/750mAh
Power (W)	2W
Operating mode	Mantained - Non Maintained
Class	II
IP	68
IK	09
Operating temperature (ºC)	5 to 35
Remote control	Yes

Dimensions (mm):

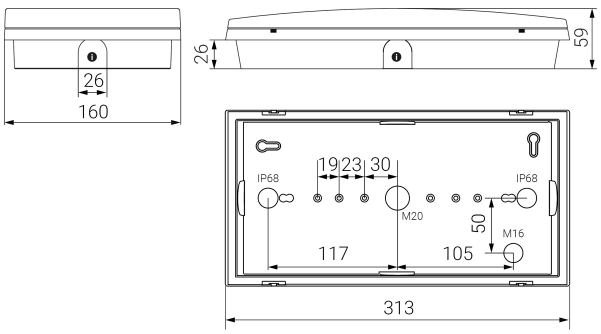

ⓘ Prensaestopa M20 (no incluido)
Cable gland M20 (not included)

Photometric data:

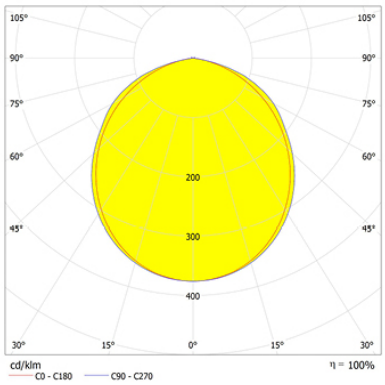

GENNIUS CRISTAL

Unit 6 Quartz Close. B5K Business Park.
Amington. Tamworth. B77 4GR, England
T. 01827 816333
normagrup@normagrup.uk
www.normalux.com

Normagrup
Sense of Technology