NORMALUX

Technical datasheet

IP65 EMERGENCY LIGHTS

Emergency Lighting
Ref. MES2FL58P2E

UNE 60598-2-22, UNE 20-392-93
230V 50HZ

Emergency Lighting: IP65 EMERGENCY LIGHTS. Reference: MES2FL58P2E, manufactured by Normalux. Lumens 1872 lm. Autonomy (h) 1h. Operating mode: Maintained. Installation: Surface Mounting. Light source: Fluorescent. Battery of: Ni-Cd 2x6V/4Ah. IP: 65. IK: 04. Version: Standard. Color: Grey. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50Hz. Dimensions (mm): 1600 x 175 x 120 mm. Manufactured according UNE 60598-2-22, UNE 20-392-93 regulations. Compatible with S-TE remote control.

Lumens	1872 lm
Color temperatures (K)	4000
Light source	Fluorescent
Autonomy (h)	1h
Battery	Ni-Cd 2x6V/4Ah
Power (W)	0W
Operating mode	Maintained
Class	II
IP	65
IK	04
Operating temperature (ºC)	5 to 35
Remote control	Yes

Dimensions (mm):

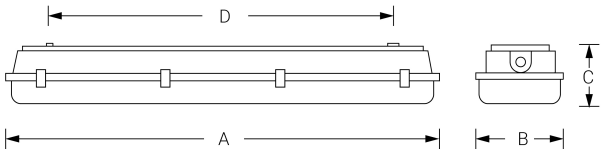

	A	B	C	D
1x18	680	105	120	500
2x18	680	175	120	500
1x36	1.280	105	120	912
2x36	1.280	175	120	912
1x58	1.600	105	120	995
2x58	1.600	175	120	995

Photometric data:

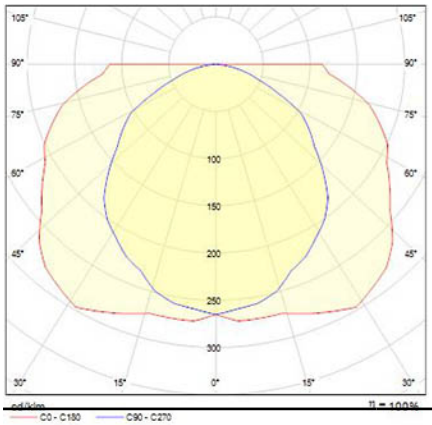

Unit 6 Quartz Close. B5K Business Park.
Amington. Tamworth. B77 4GR, England
T. 01827 816333
normagrup@normagrup.uk
www.normalux.com

Normagrup
Sense of Technology