NORMALUX

**Technical datasheet**

# VOLUTTA ENCASTRABLE

Emergency Lighting

Ref. VPL-200-2

LED CE

**UNE 60598-2-22**
**230V 50/60HZ**

Emergency Lighting: VOLUTTA ENCASTRABLE. Reference: VPL-200-2, manufactured by Normalux. Lumens 180 lm. Autonomy (h) 1h. Operating mode: Mantained - Non Maintained. Installation: Recessed Mounting. Light source: Led. Battery of: Ni-Cd 3,6V/1,5Ah. IP: 42. IK: 04. Version: Standard. Color: Aluminium. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50/60Hz. Dimensions (mm): 360 x 166 x 40 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

| | |
|---|---|
| Lumens | 180 lm |
| Color temperatures (K) | 5700 |
| Light source | Led |
| Autonomy (h) | 1h |
| Battery | Ni-Cd 3,6V/1,5Ah |
| Power (W) | 5W |
| Operating mode | Mantained - Non Maintained |
| Class | II |
| IP | 42 |
| IK | 04 |
| Operating temperature (ºC) | 5 to 35 |
| Remote control | Yes |

Dimensions (mm):

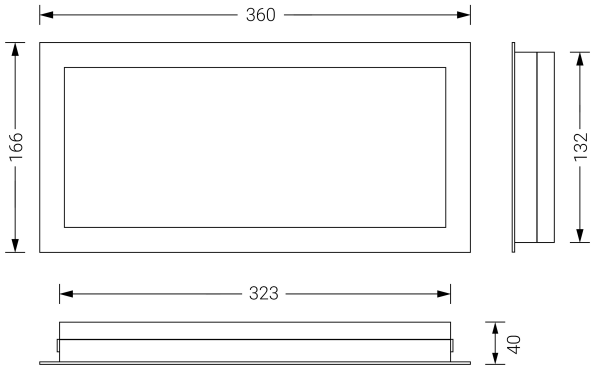


Photometric data:

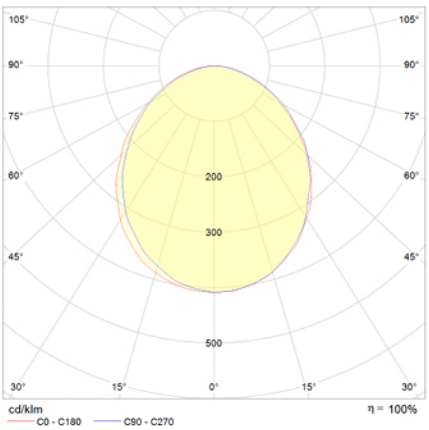


Unit 6 Quartz Close. B5K Business Park.
Amington. Tamworth. B77 4GR, England
T. 01827 816333
normagrup@normagrup.uk
**www.normalux.com**

Normagrup
Sense of Technology