

# VOLUTTA

## Technical datasheet


Emergency Lighting  
Ref. VIDL3-100



**UNE 60598-2-22**  
**230V 50/60HZ**

Emergency Lighting: VOLUTTA. Reference: VIDL3-100, manufactured by Normalux. Lumens 100 lm. Autonomy (h) 3h. Operating mode: Maintained. Installation: Wall mounted. Light source: Led. Battery of: Ni-MH 4.8V/1.5Ah. IP: 22. IK: 04. Version: DALI. Color: White. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50/60Hz. Dimensions (mm): 327 x 145 x 58 mm. Manufactured according UNE 60598-2-22 regulations.

Dimensions (mm):

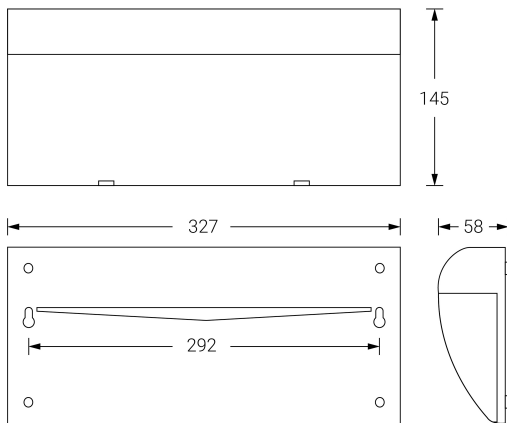

Lumens	100 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	3h
Battery	Ni-MH 4.8V/1.5Ah
Power (W)	5W
Operating mode	Maintained
Class	II
IP	22
IK	04
Operating temperature (°C)	5 to 35
Remote control	No

Photometric data:

