NORMALUX

Technical datasheet

EXTRALINE

Exit signs

Ref. XS

LED CE

EN 60598-2.22 / EN1838
230V 50/60HZ

Exit signs: EXTRALINE. Reference: XS, manufactured by Normalux. Lumens 42 lm. Autonomy (h) 1h. Operating mode: Mantained - Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Ni-Cd 3,6V/750mAh. IP: 20. IK: 07. Version: Standard. Color: White. Casing: Polycarbonate. Voltage: 230V 50/60Hz. Manufactured according EN 60598-2.22 / EN1838 regulations.

Dimensions (mm):

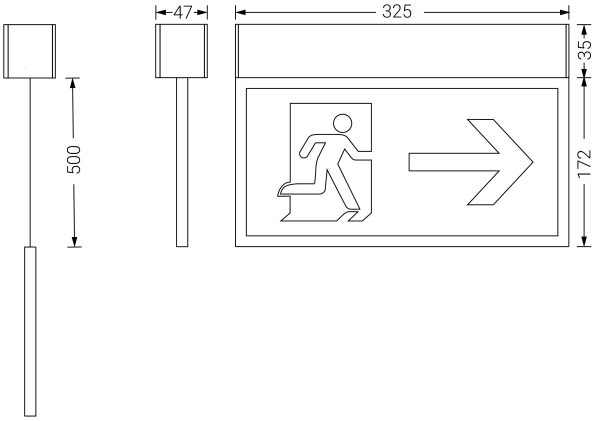

Lumens	42 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	1h
Battery	Ni-Cd 3,6V/750mAh
Power (W)	2,6W
Operating mode	Mantained - Non Maintained
Class	II
IP	20
IK	07
Operating temperature (ºC)	5 to 35
Maximum viewing distance	30m
Remote control	No

* According to EN 1838 regulations

Unit 6 Quartz Close. B5K Business Park.
Amington. Tamworth. B77 4GR, England
T. 01827 816333
normagrup@normagrup.uk
www.normalux.com

Normagrup
Sense of Technology