





Stylo

Maintained / Non-maintained multiled



The STYLO luminaire upgrades the concept of simplicity to a higher level. It is the ideal luminaire to meet basic emergency lighting needs with an attractive design.



CE 850°C LED



Lm
40-500

1-2



Ni-Cd

IP **44**

IK **04**

230 Vac



EN 60598-2-22


Stylo

Standard

Non-maintained MULTILED

IP

44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
S-30L	White	—	40 lm	1 h	0,4	20
S-60L	White	—	70 lm	1 h	0,4	20
S-100L	White	—	115 lm	1 h	0,4	20
S-150L	White	—	145 lm	1 h	0,4	20
S-200L	White	—	195 lm	1 h	0,4	20
S-300L	White	—	320 lm	1 h	0,4	20
S-400L	White	—	385 lm	1 h	0,4	20
S-500L	White	—	500 lm	1 h	0,4	20
S2-200L	White	—	270 lm	2 h	0,4	20
S3-100L	White	—	125 lm	3 h	0,4	20


Available in 127v AC 50/60Hz. Indicate reference + V.

Available in 24v DC. Indicate reference + C.

Maintained MULTILED

IP

44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
SL-60M	White	—	80 lm	1 h	0,4	20
SL-150M	White	—	160 lm	1 h	0,4	20
SL-200M	White	—	195 lm	1 h	0,4	20
SL-300M	White	—	280 lm	1 h	0,4	20
SL3-100M	White	—	105 lm	3 h	0,4	20

Available in 127v AC 50/60Hz. Indicate reference + V.


Available in 24v DC. Indicate reference + C.

Autotest

Non-maintained MULTILED

IP

44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
SA-60L	White	—	70 lm	1 h	0,4	20
SA-100L	White	—	125 lm	1 h	0,4	20
SA-150L	White	—	160 lm	1 h	0,4	20
SA-200L	White	—	195 lm	1 h	0,4	20
SA-300L	White	—	290 lm	1 h	0,4	20
SA-400L	White	—	440 lm	1 h	0,4	20
SA3-200L	White	—	185 lm	3 h	0,4	20


Available in 127v AC 50/60Hz. Indicate reference + V.

Available in 24v DC. Indicate reference + C.

Maintained MULTILED

IP

44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
SAL-60M	White	—	75 lm	1 h	0,4	20
SAL-150M	White	—	160 lm	1 h	0,4	20
SAL-200M	White	—	195 lm	1 h	0,4	20
SAL-300M	White	—	290 lm	1 h	0,4	20

Available in 127v AC 50/60Hz. Indicate reference + V.

Available in 24v DC. Indicate reference + C.

Stylo Accessories

Blade diffuser

S-DB	Flag diffuser. Compatible with all the fittings of the STYLO range.
S-DBE	Embedded mounted blade diffuser. Compatible with all the fittings for the STYLO range using the S-ME accessorie.
S-DBP	Wall mounted flag diffuser (surface mounted). Compatible with all the fittings of the STYLO range.
S-DBPE	Wall mounted blade diffuser Compatible with all the fittings for the STYLO range using the S-ME accessory

STYLO + S-DB + Pictogram Type PD



STYLO + S-ME + S-DBE + Pictogram Type PD



STYLO + S-DBP + Pictogram Type N



STYLO + S-ME + S-DBPE + Pictogram Type N




Recession frames



Valid for ceilings and concrete walls

S-ME	Recessed mounting frame for the STYLO range	PACKAGING 20
-------------	---	-----------------




Wall and ceiling mounting accessories


S-KS	Ceiling suspension with 300 mm with aluminium rod (2 units)
U-SBC	Wall fixation bracket



S-KS



U-SBC + S-DB



Stylo Accessories

Waterproof box




S-MS

IP65 IK07 box for the STYLO range.

PACKAGING

20

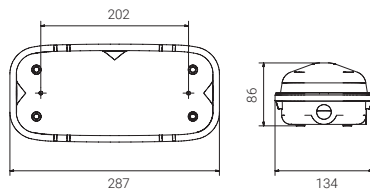


Remote controls



S-TE

Remote control for up to 300 fittings standard or autotest



Pictograms

Type LN

Adhesive pictogram 230 x 110 mm. *References according to table below*

Type PD

Non adhesive pictogram 240 x 120 mm. *References according to table below*

Type LN 230 x 110 mm



Maximum viewing distance
(according to EN1838 for
internally illuminated signs)

22 m

Type PD 240 x 120 mm




Maximum viewing distance
(according to EN1838 for
internally illuminated signs)

24 m



Please check for other pictograms

Antivandalic enclosure



U-AV

Universal antivandalic enclosure 37 x 19.8 x 9 cm