





N

New waterproof box

IP67

GS

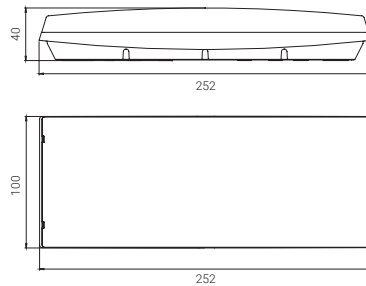

Lm
70-500

1-2




IP
44

IK
07



EN 60598-2-22



! MAXIMUM INSTALLATION COMPATIBILITY


! Suitable for use with remote control (Only non maintained fittings)

+ Remote controlled

Standard

Non-maintained MULTILED


IP
44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
G-60L	White	—	70 lm	1 h	0,3	30
G-100L	White	—	110 lm	1 h	0,3	30
G-150L	White	—	150 lm	1 h	0,3	30
G-200L	White	—	210 lm	1 h	0,3	30
G-300L	White	—	325 lm	1 h	0,4	30
G-400L	White	—	400 lm	1 h	0,4	30
G-500L	White	—	500 lm	1 h	0,4	30
G2-100L	White	—	126 lm	2 h	0,3	30
G2-300L	White	—	305 lm	2 h	0,4	30
G3-100L	White	—	130 lm	3 h	0,4	30
G3-200L	White	—	200 lm	3 h	0,4	30

127v 50/60Hz also available upon request. Indicate reference + V

Maintained MULTILED

IP
44


	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
GL-60	White	—	80 lm	1 h	0,3	30
GL-100	White	—	100 lm	1 h	0,3	30
GL-150	White	—	170 lm	1 h	0,3	30
GL-200	White	—	200 lm	1 h	0,3	30
GL-300	White	—	300 lm	1 h	0,3	30
GL3-100	White	—	110 lm	3 h	0,4	30

127v 50/60Hz also available upon request. Indicate reference + V

Autotest

Non-maintained MULTILED


IP
44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
GA-60L	White	—	70 lm	1 h	0,3	30
GA-100L	White	—	130 lm	1 h	0,3	30
GA-150L	White	—	170 lm	1 h	0,3	30
GA-200L	White	—	200 lm	1 h	0,3	30
GA-300L	White	—	310 lm	1 h	0,4	30
GA-400L	White	—	465 lm	1 h	0,4	30
GA3-200L	White	—	195 lm	3 h	0,4	30

127v 50/60Hz also available upon request. Indicate reference + V

Maintained MULTILED

IP
44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
GAL-60	White	—	75 lm	1 h	0,3	20
GAL-150	White	—	155 lm	1 h	0,3	30
GAL-200	White	—	190 lm	1 h	0,3	30
GAL-300	White	—	310 lm	1 h	0,3	30

127v 50/60Hz also available upon request. Indicate reference + V

GS Accessories

Blade diffuser

G-DB	Blade diffuser. Compatible with all the fittings of the GS range.
G-DBE	Embedded mounted blade diffuser. Compatible with all the fittings for the GS range using the G-ME accessory.
G-DBP	Wall mounted blade diffuser (surface mounted). Compatible with all the fittings of the GS range.
G-DBPE	Wall mounted flag diffuser (embedded mounted). Compatible with all the fittings for the GS range using the G-ME accessory.


GS + G-DB + Pictogram Type PD



GS + G-ME + G-DBE + Pictogram Type PD



GS + G-DBP + Pictogram Type N




GS + G-ME + G-DBPE + Pictogram Type N



Recession frames

G-ME	Recession frame for GS luminaires. White colour
G-ME-1	Recession frame for GS luminaires. Anthracite colour
G-ME-2	Recession frame for GS luminaires. Aluminium colour




GS Accessories

Waterproof housing kit

G-AMS IP65 kit (watertight rubber, PG7 cable gland and joints for screws)

N G-MS IP67 IK10 box for the GS range.

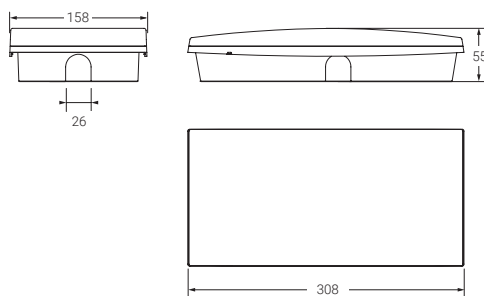


Adapter

O-AT M20 tube mounting accessory. It does not keep IP67

Remote controls



S-TE Remote control for up to 300 fittings standard or autotest



Pictograms

Type LN Adhesive pictogram 230 x 110 mm. *References according to table below*

Type PD Non adhesive pictogram 240 x 120 mm. *References according to table below*

Type LN 230 x 110 mm



Maximum viewing distance
(according to EN1838 for
internally illuminated signs)

22 m

Type PD 240 x 120 mm



Maximum viewing distance
(according to EN1838 for
internally illuminated signs)

24 m



Please check for other pictograms