




New




Up to 1200
lumen output

Hermetic




Maintained led



Maintained / Non-maintained multiled



The HERMETIC range has been designed to guarantee function in the most demanding buildings. Its IP65 combined with a wide range of versions makes it the perfect choice for large industrial areas, tunnels or car parks.

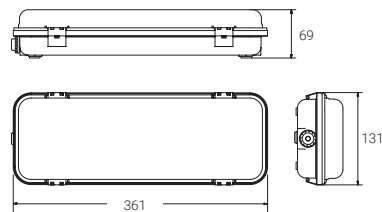

New improved optics



Remote controlled

Hermetic

Standard

Non-maintained MULTILED


IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DE-60L	White	—	60 lm	1 h	0,7	20
DE-100L	White	—	110 lm	1 h	0,7	20
DE-150L	White	—	140 lm	1 h	0,7	20
DE-200L	White	—	200 lm	1 h	0,7	20
DE-300L	White	—	330 lm	1 h	0,7	20
DE-400L	White	—	400 lm	1 h	0,8	20
DE-500L	White	—	500 lm	1 h	0,8	20
DE-600L	White	—	620 lm	1 h	0,9	20
DE-1100L	White	—	1200 lm	1 h	1,0	20
DE2-200L	White	—	200 lm	2 h	0,8	20
DE2-400L	White	—	410 lm	2 h	0,9	20
DE3-60L	White	—	60 lm	3 h	0,7	20
DE3-200L	White	—	200 lm	3 h	0,8	20

Available in 127v AC 50/60Hz. Indicate reference + V.
24Vcc also available upon request. Indicate reference + C.

Maintained LED


IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEL-100	White	—	110 lm	1 h	0,7	20
DEL-150	White	—	150 lm	1 h	0,7	20
DEL-200	White	—	200 lm	1 h	0,7	20
DEL-300	White	—	330 lm	1 h	0,7	20
DEL-400	White	—	395 lm	1 h	0,8	20
DEL-500	White	—	480 lm	1 h	0,9	20
DEL2-200	White	—	270 lm	2 h	1,4	20
DEL3-100	White	—	120 lm	3 h	1,3	20

Available in 127v AC 50/60Hz. Indicate reference + V.
24Vcc also available upon request. Indicate reference + C.

Maintained MULTILED

IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEL-60M	White	—	70 lm	1 h	0,7	20
DEL-150M	White	—	145 lm	1 h	0,7	20
DEL-200M	White	—	170 lm	1 h	0,7	20
DEL-300M	White	—	325 lm	1 h	0,7	20
DEL2-200M	White	—	240 lm	2 h	0,7	20


Available in 127v AC 50/60Hz. Indicate reference + V.
24Vcc also available upon request. Indicate reference + C.

Hermetic

Autotest

Non-maintained MULTILED


IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEA-60L	White	—	70 lm	1 h	0,7	20
DEA-100L	White	—	110 lm	1 h	0,7	20
DEA-150L	White	—	145 lm	1 h	0,7	20
DEA-200L	White	—	195 lm	1 h	0,7	20
DEA-300L	White	—	290 lm	1 h	0,7	20
DEA-400L	White	—	390 lm	1 h	0,8	20
DEA-500L	White	—	490 lm	1 h	0,8	20
DEA2-200L	White	—	210 lm	2 h	0,7	20
DEA3-200L	White	—	180 lm	3 h	0,8	20

127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Maintained MULTILED

IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEAL-100M	White	—	92 lm	1 h	0,7	20
DEAL-200M	White	—	210 lm	1 h	0,7	20
DEAL-300M	White	—	300 lm	1 h	0,7	20
DEAL2-200M	White	—	200 lm	2 h	0,7	20
DEAL3-100M	White	—	100 lm	3 h	0,9	20


127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Intelligent DALI

Compatible with **NormaLINK** 

Non-maintained MULTILED


IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEID-100L	White	DALI	140 lm	1 h	0,7	20
DEID-200L	White	DALI	190 lm	1 h	0,7	20
DEID-300L	White	DALI	300 lm	1 h	0,7	20
DEID-400L	White	DALI	410 lm	1 h	0,8	20
DEID-500L	White	DALI	500 lm	1 h	0,8	20
DEID2-200L	White	DALI	200 lm	2 h	0,7	20
DEID3-200L	White	DALI	205 lm	3 h	0,8	20
DEID3-500L	White	DALI	490 lm	3 h	1,0	20

127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Maintained MULTILED

IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEIDL-100M	White	DALI	92 lm	1 h	0,7	20
DEIDL-200M	White	DALI	210 lm	1 h	0,7	20
DEIDL-300M	White	DALI	300 lm	1 h	0,7	20
DEIDL2-200M	White	DALI	200 lm	2 h	0,7	20
DEIDL3-100M	White	DALI	100 lm	3 h	0,7	20


127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Hermetic

Central Battery System

Maintained MULTILED

IP 65


		FINISHING	POWER SUPPLY	LUMEN OUTPUT	CONSUMPTION	CURRENT		PACKAGING
C24	DE-S32L24	White	24 Vcc	300 lm	3,5 W	0,146 A	0,6	20
C24i	DEI-S32L24	White	24 Vcc	310 lm	3 W	0,125 A	0,6	20
C24i	DEI-S32LH24	White	24 Vcc	450 lm	7 W	0,292 A	0,6	20
	DE-S3L	White	230 Vca	300 lm	3,5 W	0,040 A	0,8	20

Accessories

Blade diffuser



DE-DB Blade diffuser with PVC screws for the HERMETIC range

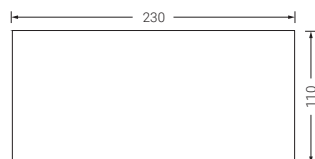

Remote controls

S-TE Remote control for up to 300 fittings standard or autotest

Pictograms

Type LN Adhesive pictogram 230 x 110 mm. *References according to table below*

Type LN 230 x 110 mm



Maximum viewing distance (according to EN1838 for internally illuminated signs)

22 m



Please check for other pictograms

Antivandalic enclosure

U-AV Universal antivandalic enclosure 37 x 19.8 x 9 cm