




# Smart




Some versions compliant with French Regulation

Maintained / Non-maintained multiled



SMART is a range of emergency luminaires designed to adapt to any type of installation thanks to their stylish minimalist lines, their versatility and their ease of installation.



Quick assembly



Lm  
**70-390**

**1-2-3**



SATI

SATI ADRESSABLE

Ni-Cd

IP  
**42**

IK  
**07**

230 Vac



EN 60598-2-22



Remote controlled

## Smart

## Standard


## Non-maintained MULTILED

IP  
42

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>SS-100L</b>	White	—	70 lm	1 h	0,4	20
<b>SS-200L</b>	White	—	190 lm	1 h	0,4	20
<b>SS-300L</b>	White	—	330 lm	1 h	0,5	20
<b>SS-400L</b>	White	—	390 lm	1 h	0,5	20
<b>SS2-300L</b>	White	—	260 lm	2 h	0,5	20
<b>SS3-100L</b>	White	—	100 lm	3 h	0,4	20

## Maintained MULTILED


IP  
42

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>SSL-100</b>	White	—	130 lm	1 h	0,4	20
<b>SSL-200</b>	White	—	220 lm	1 h	0,5	20
<b>SSL-300</b>	White	—	270 lm	1 h	0,5	20

## Autotest


## Non-maintained MULTILED

IP  
42

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>SSA-100L</b>	White	—	70 lm	1 h	0,4	20
<b>SSA-200L</b>	White	—	190 lm	1 h	0,4	20
<b>SSA-300L</b>	White	—	300 lm	1 h	0,5	20
<b>SSA2-300L</b>	White	—	350 lm	2 h	0,5	20
<b>SSA3-100L</b>	White	—	120 lm	3 h	0,5	20

## Maintained / Non-maintained MULTILED

IP  
42


	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>SSAL-100</b>	White	—	130 lm	1 h	0,4	20
<b>SSAL-200</b>	White	—	230 lm	1 h	0,4	20
<b>SSAL-300</b>	White	—	320 lm	1 h	0,4	20
<b>SSAL3-100</b>	White	—	115 lm	3 h	0,4	20

## Intelligent DALI

Compatible with **NormaLINK** 

## Non-maintained MULTILED

IP  
42

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>SSID-100L</b>	White	DALI	100 lm	1 h	0,4	20
<b>SSID-200L</b>	White	DALI	190 lm	1 h	0,4	20
<b>SSID-300L</b>	White	DALI	330 lm	1 h	0,5	20

## Central Battery System

IP  
42


	FINISHING	POWER SUPPLY	LUMEN OUTPUT	CONSUMPTION	CURRENT		PACKAGING
<b>SS-S25L</b>	White	230 Vca	300 lm	3,5 W	0,018 A	0,3	20

# Smart Accessories


## Recession frames




		PACKAGING
<b>SS-ME</b>	Recessed mounting frame for the SMART range. White colour	20

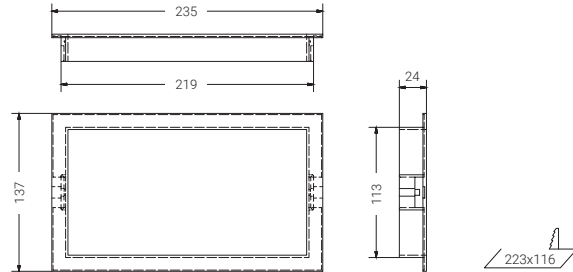

## Waterproof kit




		PACKAGING
<b>SS-MS</b>	IP65 IK07 housing. Compatible with all the Smart range fittings	20

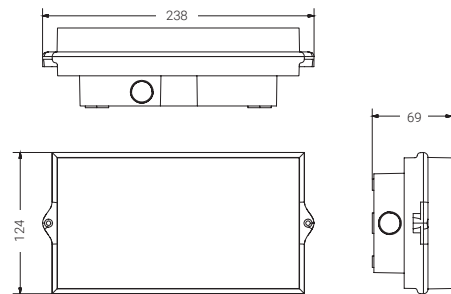

## Blade diffuser




		PACKAGING
<b>SS-DB</b>	Blade diffuser compatible with all the fittings of SMART product range	20
<b>SS-DBE</b>	Blade diffuser compatible with the recession frame SS-ME (not included)	20



# Smart Accessories

## Antivandalic enclosure



**U-AVC**

Antivandalic enclosure

PACKAGING


20

## Remote controls



**S-TE**

Remote control for up to 300 fittings standard or autotest



## Pictograms

**Type PS**

Non adhesive pictogram 200 x 120 mm. *References according to table below*

**Type SN**

Adhesive pictogram 200 x 120 mm. *References according to table below*

**Type PS** 200 x 120 mm



Maximum viewing distance  
(according to EN1838 for  
internally illuminated signs)

**24 m**

**Type SN** 200 x 120 mm



Maximum viewing distance  
(according to EN1838 for  
internally illuminated signs)

**24 m**



Please check for other pictograms