




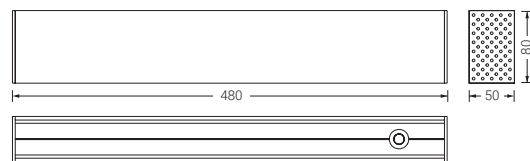

Lissa

emergency light



Lm
320

1-3



Ni-Cd /
 Ni-MH

IP
20

IK
08

230 Vac

24 Vdc

EN 60598-2-22

Available also as Exit sign
 (page 122)

For special luminaires,
 please contact us

Lissa emergency light

Surface

Standard

Maintained / Non-maintained MULTILED


IP
20

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
LNL-300	White	—	254 lm	1 h	2,2	20
LNL3-300	White	—	254 lm	3 h	2,6	20

Autotest

Maintained / Non-maintained MULTILED

IP
20


	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
LNAL-300	White	—	254 lm	1 h	2,2	20
LNAL3-300	White	—	254 lm	3 h	2,6	20

Intelligent DALI

Compatible with **NormaLINK** 

Maintained / Non-maintained MULTILED


IP
20

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
LNIDL-300	White	DALI	254 lm	1 h	2,2	20
LNIDL3-300	White	DALI	254 lm	3 h	2,2	20


Central Battery System

Maintained MULTILED

IP
20

	FINISHING	POWER SUPPLY	LUMEN OUTPUT	CONSUMPTION	CURRENT		PACKAGING
C24 LN-300-S24	White	24 Vcc	254 lm	4 W	0,166 A	1,9	20
C24i LNI-300-S24	White	24 Vcc	254 lm	4 W	0,166 A	1,9	20
LN-300-S	White	230 Vca	254 lm	5 W	0,044 A	1,9	20


Recessed mounting

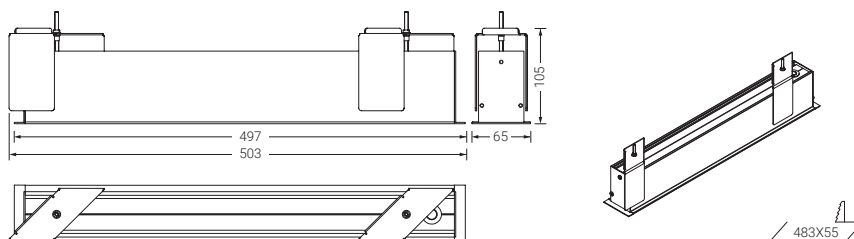

Standard

Maintained / Non-maintained MULTILED


IP
20

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
LNEL-300	White	—	254 lm	1 h	3,3	20
LNEL3-300	White	—	254 lm	3 h	3,6	20

Autotest

Maintained / Non-maintained MULTILED

IP
20

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
LNEAL-300	White	—	254 lm	1 h	3,3	20
LNEAL3-300	White	—	254 lm	3 h	3,6	20


Intelligent DALI

Compatible with **NormaLINK** 



Maintained / Non-maintained MULTILED

IP
20

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
LNEIDL-300	White	DALI	254 lm	1 h	3,3	20
LNEIDL3-300	White	DALI	254 lm	3 h	2,8	20




Lissa emergency light recessed mounting

Central Battery System

Maintained MULTILED

IP
20

		FINISHING	POWER SUPPLY	LUMEN OUTPUT	CONSUMPTION	CURRENT		PACKAGING
C24	LNE-300-S24	White	24 Vcc	254 lm	4 W	0,166 A	2,5	20
C24i	LNEI-300-S24	White	24 Vcc	254 lm	4 W	0,166 A	3,0	20
	LNE-300-S	White	230 Vca	254 lm	5 W	0,044 A	3,0	20

