





Volutta

Maintained / Non-maintained led



Volutta is the result of mixing equal parts of versatility and style.

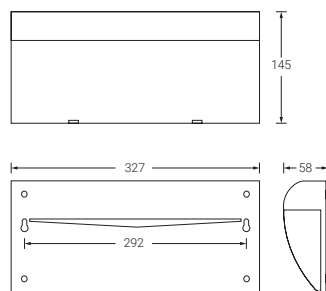

Lm
45-370

1-2-3



Ni-Cd

IP
22

IK
04

230 Vac

24 Vdc



EN 60598-2-22




Remote controlled

Volutta

Standard


Non-maintained MULTILED

IP
22

| | FINISHING | COM. | LUMEN OUTPUT | AUTONOMY |  | PACKAGING |
|---------------|--------------|------|---------------|------------|---|-----------|
| V-50L | White | — | 45 lm | 1 h | 0,6 | 20 |
| V-50L-1 | Anthracite | — | 45 lm | 1 h | 0,6 | 20 |
| V-50L-2 | Aluminium | — | 45 lm | 1 h | 0,6 | 20 |
| V-75L | White | — | 90 lm | 1 h | 0,6 | 20 |
| V-75L-1 | Anthracite | — | 90 lm | 1 h | 0,6 | 20 |
| V-75L-2 | Aluminium | — | 90 lm | 1 h | 0,6 | 20 |
| V-170L | White | — | 150 lm | 1 h | 0,6 | 20 |
| V-170L-1 | Anthracite | — | 150 lm | 1 h | 0,6 | 20 |
| V-170L-2 | Aluminium | — | 150 lm | 1 h | 0,6 | 20 |
| V-300L | White | — | 290 lm | 1 h | 0,7 | 20 |
| V-300L-1 | Anthracite | — | 290 lm | 1 h | 0,7 | 20 |
| V-300L-2 | Aluminium | — | 290 lm | 1 h | 0,7 | 20 |
| V-400L | White | — | 370 lm | 1 h | 0,7 | 20 |
| V-400L-1 | Anthracite | — | 370 lm | 1 h | 0,7 | 20 |
| V-400L-2 | Aluminium | — | 370 lm | 1 h | 0,7 | 20 |

Maintained MULTILED

IP
22

| | FINISHING | COM. | LUMEN OUTPUT | AUTONOMY |  | PACKAGING |
|----------------|--------------|------|---------------|------------|---|-----------|
| VL-60 | White | — | 60 lm | 1 h | 0,6 | 20 |
| VL-60-1 | Anthracite | — | 60 lm | 1 h | 0,6 | 20 |
| VL-60-2 | Aluminium | — | 60 lm | 1 h | 0,6 | 20 |
| VL-200 | White | — | 285 lm | 1 h | 0,6 | 20 |
| VL-200-1 | Anthracite | — | 285 lm | 1 h | 0,6 | 20 |
| VL-200-2 | Aluminium | — | 285 lm | 1 h | 0,6 | 20 |
| VL2-200 | White | — | 200 lm | 2 h | 0,7 | 20 |
| VL2-200-1 | Anthracite | — | 200 lm | 2 h | 0,7 | 20 |
| VL2-200-2 | Aluminium | — | 200 lm | 2 h | 0,7 | 20 |

Volutta

Autotest

Maintained LED

IP
22


| | FINISHING | COM. | LUMEN OUTPUT | AUTONOMY |  | PACKAGING |
|-----------------|--------------|------|---------------|------------|---|-----------|
| VAL-100 | White | — | 80 lm | 1 h | 0,6 | 20 |
| VAL-100-1 | Anthracite | — | 80 lm | 1 h | 0,6 | 20 |
| VAL-100-2 | Aluminium | — | 80 lm | 1 h | 0,6 | 20 |
| VAL-200 | White | — | 180 lm | 1 h | 0,6 | 20 |
| VAL-200-1 | Anthracite | — | 180 lm | 1 h | 0,6 | 20 |
| VAL-200-2 | Aluminium | — | 180 lm | 1 h | 0,6 | 20 |
| VAL3-100 | White | — | 100 lm | 3 h | 0,6 | 20 |
| VAL3-100-1 | Anthracite | — | 100 lm | 3 h | 0,6 | 20 |
| VAL3-100-2 | Aluminium | — | 100 lm | 3 h | 0,6 | 20 |

Intelligent DALI

Compatible with **NormaLINK** 

Maintained LED


IP
22

| | FINISHING | COM. | LUMEN OUTPUT | AUTONOMY |  | PACKAGING |
|------------------|--------------|-------------|---------------|------------|--|-----------|
| VIDL-100 | White | DALI | 80 lm | 1 h | 0,8 | 20 |
| VIDL-100-1 | Anthracite | DALI | 80 lm | 1 h | 0,8 | 20 |
| VIDL-100-2 | Aluminium | DALI | 80 lm | 1 h | 0,8 | 20 |
| VIDL-200 | White | DALI | 200 lm | 1 h | 0,8 | 20 |
| VIDL-200-1 | Anthracite | DALI | 200 lm | 1 h | 0,8 | 20 |
| VIDL-200-2 | Aluminium | DALI | 200 lm | 1 h | 0,8 | 20 |
| VIDL3-100 | White | DALI | 100 lm | 3 h | 0,8 | 20 |
| VIDL3-100-1 | Anthracite | DALI | 100 lm | 3 h | 0,8 | 20 |
| VIDL3-100-2 | Aluminium | DALI | 100 lm | 3 h | 0,8 | 20 |

Central Battery System

Maintained LED

IP
22

| | FINISHING | POWER SUPPLY | LUMEN OUTPUT | CONSUMPTION | CURRENT |  | PACKAGING |
|--------------------|-----------|--------------|--------------|-------------|---------|---|-----------|
| C24 V-S3L24 | White | 24 Vcc | 250 lm | 6,0 W | 0,250 A | 0,6 | 20 |
| V-S3L | White | 230 Vca | 250 lm | 6,0 W | 0,069 A | 0,6 | 20 |


Volutta Accessories

Remote controls



Compatible with all the VOLUTTA range

S-TE Remote control for up to 300 fittings Standard or autotest

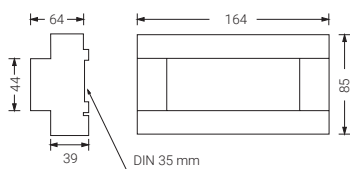

Pictograms

Type PN Adhesive pictogram 300 x 130 mm. *References according to table below*

Type PN 300 x 130 mm



Maximum viewing distance (according to EN1838 for internally illuminated signs)

26 m

 Please check for other pictograms

