








Volutta

recessed mounting

Maintained led



Non-maintained led




Volutta recessed mounting

WALL MOUNTING




Box for wall mounting (supplied with rear box for recession)

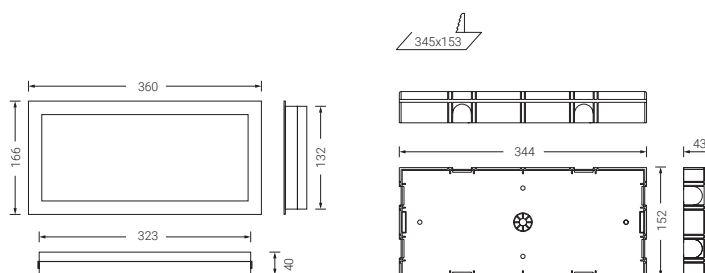

Standard

Non-maintained MULTILED

IP 44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
VP-80L	White	—	90 lm	1 h	1,5	20
VP-80L-1	Anthracite	—	90 lm	1 h	1,5	20
VP-80L-2	Aluminium	—	90 lm	1 h	1,5	20
VP-200L	White	—	220 lm	1 h	1,5	20
VP-200L-1	Anthracite	—	220 lm	1 h	1,5	20
VP-200L-2	Aluminium	—	220 lm	1 h	1,5	20
VP-300L	White	—	350 lm	1 h	1,6	20
VP-300L-1	Anthracite	—	350 lm	1 h	1,6	20
VP-300L-2	Aluminium	—	350 lm	1 h	1,6	20
VP-400L	White	—	400 lm	1 h	1,6	20
VP-400L-1	Anthracite	—	400 lm	1 h	1,6	20
VP-400L-2	Aluminium	—	400 lm	1 h	1,6	20
VP-500L	White	—	500 lm	1 h	1,6	20
VP-500L-1	Anthracite	—	500 lm	1 h	1,6	20
VP-500L-2	Aluminium	—	500 lm	1 h	1,6	20
VP2-200L	White	—	200 lm	2 h	1,6	20
VP2-200L-1	Anthracite	—	200 lm	2 h	1,6	20
VP2-200L-2	Aluminium	—	200 lm	2 h	1,6	20
VP3-80L	White	—	80 lm	3 h	1,5	20
VP3-80L-1	Anthracite	—	80 lm	3 h	1,5	20
VP3-80L-2	Aluminium	—	80 lm	3 h	1,5	20


Maintained / Non-maintained LED

IP 42

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
VPL-60	White	—	95 lm	1 h	0,9	20
VPL-60-1	Anthracite	—	95 lm	1 h	0,9	20
VPL-60-2	Aluminium	—	95 lm	1 h	0,9	20
VPL-150	White	—	130 lm	1 h	0,9	20
VPL-150-1	Anthracite	—	130 lm	1 h	0,9	20
VPL-150-2	Aluminium	—	130 lm	1 h	0,9	20
VPL-200	White	—	180 lm	1 h	1,0	20
VPL-200-1	Anthracite	—	180 lm	1 h	1,0	20
VPL-200-2	Aluminium	—	180 lm	1 h	1,0	20
VPL2-200	White	—	180 lm	2 h	1,2	20
VPL2-200-1	Anthracite	—	180 lm	2 h	1,2	20
VPL2-200-2	Aluminium	—	180 lm	2 h	1,2	20
VPL3-100	White	—	100 lm	3 h	1,0	20
VPL3-100-1	Anthracite	—	100 lm	3 h	1,0	20
VPL3-100-2	Aluminium	—	100 lm	3 h	1,0	20

Volutta recessed mounting


CEILING MOUNTING

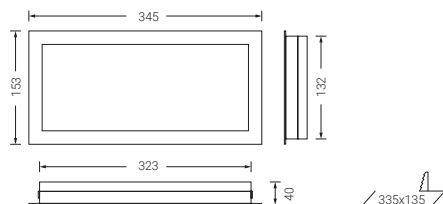

Standard


Non-maintained MULTILED

IP
44

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
VT-80L	White	—	90 lm	1 h	0,8	20
VT-80L-1	Anthracite	—	90 lm	1 h	0,8	20
VT-80L-2	Aluminium	—	90 lm	1 h	0,8	20
VT-200L	White	—	220 lm	1 h	0,8	20
VT-200L-1	Anthracite	—	220 lm	1 h	0,8	20
VT-200L-2	Aluminium	—	220 lm	1 h	0,8	20
VT-300L	White	—	350 lm	1 h	0,9	20
VT-300L-1	Anthracite	—	350 lm	1 h	0,9	20
VT-300L-2	Aluminium	—	350 lm	1 h	0,9	20
VT-400L	White	—	400 lm	1 h	0,9	20
VT-400L-1	Anthracite	—	400 lm	1 h	0,9	20
VT-400L-2	Aluminium	—	400 lm	1 h	0,9	20
VT-500L	White	—	500 lm	1 h	1,0	20
VT-500L-1	Anthracite	—	500 lm	1 h	1,0	20
VT-500L-2	Aluminium	—	500 lm	1 h	1,0	20
VT2-200L	White	—	200 lm	2 h	0,9	20
VT2-200L-1	Anthracite	—	200 lm	2 h	0,9	20
VT2-200L-2	Aluminium	—	200 lm	2 h	0,9	20
VT3-80L	White	—	80 lm	3 h	0,8	20
VT3-80L-1	Anthracite	—	80 lm	3 h	0,8	20
VT3-80L-2	Aluminium	—	80 lm	3 h	0,8	20

Maintained LED

IP
42

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
VTL-60	White	—	95 lm	1 h	0,8	20
VTL-60-1	Anthracite	—	95 lm	1 h	0,8	20
VTL-60-2	Aluminium	—	95 lm	1 h	0,8	20
VTL-150	White	—	130 lm	1 h	0,8	20
VTL-150-1	Anthracite	—	130 lm	1 h	0,8	20
VTL-150-2	Aluminium	—	130 lm	1 h	0,8	20
VTL-200	White	—	180 lm	1 h	0,9	20
VTL-200-1	Anthracite	—	180 lm	1 h	0,9	20
VTL-200-2	Aluminium	—	180 lm	1 h	0,9	20
VTL2-200	White	—	180 lm	2 h	0,9	20
VTL2-200-1	Anthracite	—	180 lm	2 h	0,9	20
VTL2-200-2	Aluminium	—	180 lm	2 h	0,9	20
VTL3-100	White	—	100 lm	3 h	0,9	20
VTL3-100-1	Anthracite	—	100 lm	3 h	0,9	20
VTL3-100-2	Aluminium	—	100 lm	3 h	0,9	20

Volutta recessed mounting

Central Battery System

Maintained LED

IP 42


	FINISHING	POWER SUPPLY	LUMEN OUTPUT	CONSUMPTION	CURRENT	PACKAGING
VT-S3L	White	230 Vca	250 lm	3,8 W	0,069 A	20

Accessories

Blade diffuser



	DESCRIPTION	PACKAGING
F-DBE	Blade diffuser with transparent fixing accessory . Embedded mounted with F-ME accessory (not included).	20




Remote controls



Compatible with all the VOLUTTA range

	DESCRIPTION	PACKAGING
S-TE	Remote control for up to 300 fittings standard or autotest	



Pictograms

Type PF	Non adhesive pictogram 320 x 150 mm for F-DBE and F-DBL accessories <i>References according to table below</i>
Type PN	Adhesive pictogram 300 x 130 mm. <i>References according to table below</i>

Type PF 320 x 150 mm



Maximum viewing distance (according to EN1838 for internally illuminated signs)

30 m

Type PN 300 x 130 mm



Maximum viewing distance (according to EN1838 for internally illuminated signs)

26 m



Please check for other pictograms