





Now  
with LiFePO4  
lithium batteries

# Euoprisma



The emergency fittings from the EUROPRISMA range have been designed to guarantee function in the most challenging installations. Their IP65 rating combined with a wide range of products make them the ideal choice for industrial installations.

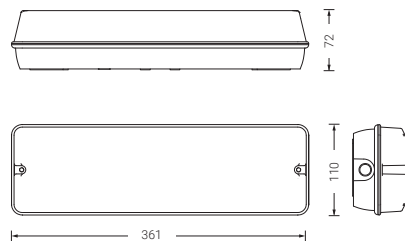

**!** Low temperature versions on page 99

**!** Available with lithium battery




## Europrisma

## Standard

## Non-maintained MULTILED

IP  
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>EH-200L</b>	White	—	200 lm	1 h	0,7	20
<b>EH-300L</b>	White	—	300 lm	1 h	0,7	20
<b>EH3-100L</b>	White	—	100 lm	3 h	0,7	20

## Maintained / Non-maintained MULTILED


IP  
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>EHL-200M</b>	White	—	250 lm	1 h	0,7	20
<b>EHL3-100M</b>	White	—	110 lm	3 h	0,7	20

## Autotest

## Maintained / Non-maintained LED

IP  
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>LITHIUM</b> <b>EHAL-250LI</b>	White	—	240 lm	1 h	0,6	20
<b>LITHIUM</b> <b>EHAL-500LI</b>	White	—	500 lm	1 h	0,8	20
<b>LITHIUM</b> <b>EHAL3-250LI</b>	White	—	240 lm	3 h	0,7	20

## Maintained / Non-maintained MULTILED

IP  
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>EHAL-200M</b>	White	—	240 lm	1 h	0,7	20
<b>EHAL3-100M</b>	White	—	110 lm	3 h	0,7	20

## Europrisma

## Intelligent DALI

Compatible with **NormaLINK**

## Maintained / Non-maintained MULTILED

IK 10 IP 65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING	
<b>LITHIUM</b>	<b>EHIDL-200M</b>	White	DALI	270 lm	1 h	0,7	20
	<b>EHIDL-250LI</b>	White	DALI	240 lm	1 h	0,7	20
<b>LITHIUM</b>	<b>EHIDL3-100M</b>	White	DALI	110 lm	3 h	0,7	20
	<b>EHIDL3-250LI</b>	White	DALI	240 lm	3 h	0,7	20

## Intelligent Wireless



New

## Maintained / Non-maintained MULTILED

IK 10 IP 65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING	
	<b>EHIDL-200M-R</b>	White	DALI	270 lm	1 h	0,7	20
	<b>EHIDL3-100M-R</b>	White	DALI	110 lm	3 h	0,7	20

## Central Battery System

## Maintained MULTILED

IP 65

	FINISHING	POWER SUPPLY	LUMEN OUTPUT	CONSUMPTION	CURRENT		PACKAGING	
<b>C24</b>	<b>EH-S24L24</b>	White	24 Vcc	290 lm	2,9 W	0,121 A	0,6	20
<b>C24i</b>	<b>EHI-S25L24</b>	White	24 Vcc	240 lm	3 W	0,125 A	0,7	20
	<b>EH-S25L</b>	White	230 Vca	270 lm	2,7 W	0,015 A	0,7	20

Emergency lighting

Europrisma

# Emergency light adapted to the cold



New

Refrigerating chambers, ship's holds, high mountain cabins... standard general lighting is not design for such situations.

Europrisma is the emergency lighting created to achieve its optimal performance and to ensure the safety with extreme temperatures.

Working temperature up to -25°C

Maintained / Non-maintained MULTILED



	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
<b>EHIDL-200C</b>	White	DALI	240 lm	1 h	0,7	20
<b>EHIDL-400C</b>	White	DALI	400 lm	1 h	0,7	20



**NORMALUX**

Emergency lighting  
[normalux.com](http://normalux.com)



**Normagrup**


Sense of Technology

# Europrisma Accessories

## Blade diffuser




**EH-DB** Flag diffuser for all the fittings of the Europrisma range

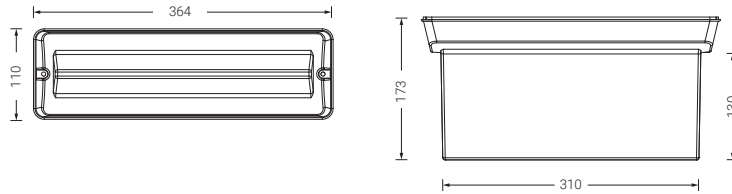

## Recession frames



**EH-ME** Recession frame for the EUROPRISMA series

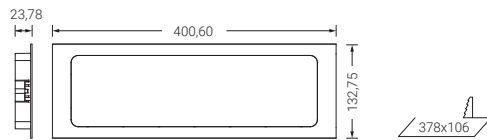

**!** Watertight and suitable for recession mounted

## Wall and ceiling brackets


**E-SB** Bracket for wall mounting

**E-SBT** Bracket for ceiling mounting

## Remote controls



**S-TE** Remote control for up to 300 fittings standard or autotest



## Pictograms



**Type PM** Internal pictogram 300 x 100 mm. *References according to table below*

**Type PM** 300 x 100 mm



Maximum viewing distance (according to EN1838 for internally illuminated signs)

**20 m**

**!** Please check for other pictograms

