




Hermetic XL

Maintained / Non-maintained multiled



HERMETIC XL is a waterproof (IP66) luminaire ideal for basements, garages or any industrial activity. Specifically designed with LED technology, it incorporates the new and revolutionary quick installation system which improves installation time and optimises maintenance work.

CE 850°C LED

Lm
1330-1960

IP66 IK10

230 Vac 24 Vdc

Ni-MH

EN 60598-2-22

85


56

256

39

225

! Quick installation system

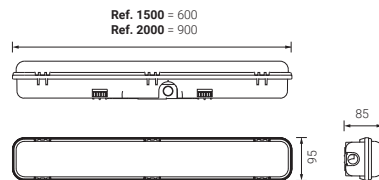

! Quick assembly

Base enchufable


+ Remote controlled

Hermetic XL

Standard

Non-maintained MULTILED

IP
66

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DE-1500L	Grey	—	1330 lm	1 h	1,4	1
DE-2000L	Grey	—	1960 lm	1 h	2,3	1

127v 50/60Hz also available upon request. Indicate reference + V

Maintained / Non-maintained MULTILED

IP
66


	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEL-1500	Grey	—	1330 lm	1 h	2,1	1
DEL-2000	Grey	—	1960 lm	1 h	2,9	1

127v 50/60Hz also available upon request. Indicate reference + V

Autotest

Non-maintained MULTILED

IP
66

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEA-1500L	Grey	—	1330 lm	1 h	2,1	1
DEA-2000L	Grey	—	1960 lm	1 h	2,9	1

127v 50/60Hz also available upon request. Indicate reference + V

Maintained / Non-maintained MULTILED

IP
66

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEAL-1500	Grey	—	1330 lm	1 h	2,1	1
DEAL-2000	Grey	—	1960 lm	1 h	2,9	1


127v 50/60Hz also available upon request. Indicate reference + V

Intelligent DALI

Compatible with **NormaLINK** 

Non-maintained MULTILED

IP
66

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEID-1500L	Grey	DALI	1330 lm	1 h	2,1	1
DEID-2000L	Grey	DALI	1960 lm	1 h	2,0	1



127v 50/60Hz also available upon request. Indicate reference + V

Maintained / Non-maintained MULTILED

IP
66

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DEIDL-1500	Grey	DALI	1330 lm	1 h	2,1	1
DEIDL-2000	Grey	DALI	1960 lm	1 h	2,9	1

127v 50/60Hz also available upon request. Indicate reference + V

 Please ask for the references with remote control option For other durations, please contact us

Accessories

Remote controls

S-TE Remote control for up to 300 fittings standard or autotest