


Now
maintained standard,
autotest or DALI.

Dopplo





Some versions compliant
with French Regulation



! Quick assembly


The DOPPLO emergency fittings have been designed to cover large surfaces in spaces that require an aesthetic design. Made with a polycarbonate housing, they form wide light range that makes them versatile fittings for large and medium-sized spaces (large halls, pavilions, sports centres etc.).

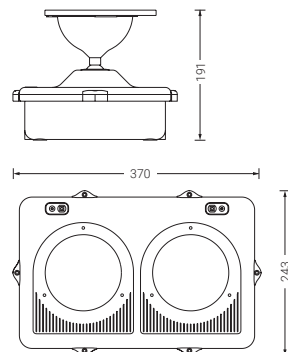

Lm
1000-3500 **1-2-3**



IP
65 IK
07



EN 60598-2-22

+ Remote controlled

Dopplo

Standard

Non-maintained LED

IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DO-1100L	Grey	—	1040 lm	1 h	5,2	1
DO-1900L	Grey	—	1850 lm	1 h	5,9	1
DO-2400L	Grey	—	2300 lm	1 h	6,3	1
DO-3000L	Grey	—	3500 lm	1 h	7,2	1
DO2-1900L	Grey	—	1850 lm	2 h	6,3	1
DO3-1000L	Grey	—	1000 lm	3 h	6,3	1

127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Maintained / Non-maintained LED

IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
N DOL-1900	Grey	—	1850 lm	1 h	5,8	1

127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Autotest

Non-maintained LED

IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DOA-1100L	Grey	—	1040 lm	1 h	5,2	1
DOA-1900L	Grey	—	1850 lm	1 h	5,9	1
DOA-2400L	Grey	—	2300 lm	1 h	6,3	1
DOA-3000L	Grey	—	3500 lm	1 h	7,2	1
DOA2-1900L	Grey	—	1950 lm	2 h	7,2	1
DOA3-1000L	Grey	—	1000 lm	3 h	7,0	1

127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Maintained / Non-maintained LED

IP
65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
N DOAL-1900	Grey	—	1850 lm	1 h	5,8	1

127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Dopplo

Intelligent DALI

Compatible with **NormaLINK**



Non-maintained LED

IP 65

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DOID-1100L	Grey	DALI	1040 lm	1 h	5,3	1
DOID-1900L	Grey	DALI	2100 lm	1 h	6,0	1
DOID-2400L	Grey	DALI	2070 lm	1 h	6,4	1
DOID-3000L	Grey	DALI	3500 lm	1 h	6,4	1
DOID2-1900L	Grey	DALI	1850 lm	2 h	8,9	1
DOID3-1000L	Grey	DALI	1000 lm	3 h	6,4	1

127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Maintained / Non-maintained LED

IP 65



	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
DOIDL-1900	Grey	DALI	1850 lm	1 h	4,8	1

127V 50/60Hz 24Vcc also available upon request. Indicate reference + V.

Central Battery System



C24i

Maintained LED

IP 65


	FINISHING	POWER SUPPLY	LUMEN OUTPUT	CONSUMPTION	CURRENT		PACKAGING
DOI-S2L24	Grey	24 Vcc	1800 lm	23 W	0,958 A	4,4	1

Accessories


Remote controls



S-TE Remote control for up to 300 fittings standard or autotest

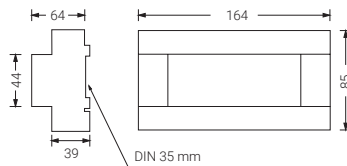

Antivandalic enclosure



DO-AV Antivandalic enclosure.
Measurements in cm: 45 x 30 x 25

PACKAGING

1

