




Extraline




30 m.



Cd/klm
 $\eta=77\%$

EXTRALINE has been born as an evolved version of the SIGNAL7 product range with two models depending on the mode of operation:

- Exit sign model (reference XS), to help locate the exits in the evacuation route.
- Exit sign + emergency lighting model (reference XD), which locates the exits and illuminates the evacuation route at the same time. This second function is achieved by means of a secondary source of light located in the lower part of the pictogram.

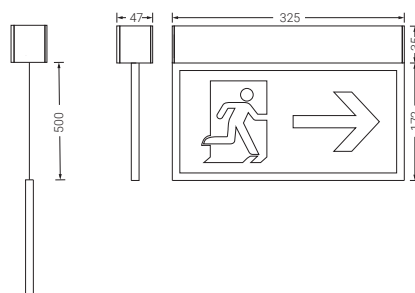

EN 60598-2-22
 EN 60598-1

EN 1838 | 30 m




Blade diffuser, suspension kit and pictograms PEX-A, PEX-SD, PEX-SU and PEX-W included.

Extraline

Standard

Maintained / Non-maintained MULTILED


IP 20

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
XS	White	–	–	1 h	1,1	12
XD	White	–	100 lm	1 h	1,2	12
XS3	White	–	–	3 h	1,1	12
XD3	White	–	60 lm	3 h	1,2	12


XD Fitting with double function:

Exit sign and emergency lighting


XS



XD



Two different mounting options not requiring extra accessories:
surface mounted on the ceiling or suspended from the ceiling.

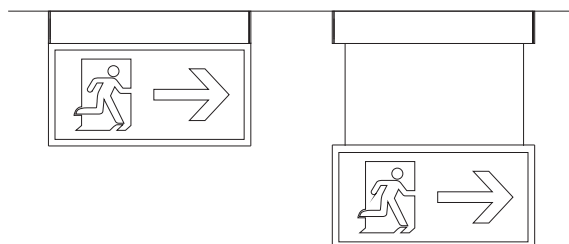


Extraline

Autotest

Maintained / Non-maintained MULTILED

IP
20


	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
XSA	White	–	–	1 h	1,1	12
XDA	White	–	100 lm	1 h	1,2	12
XSA3	White	–	–	3 h	1,2	12
XDA3	White	–	60 lm	3 h	1,2	12

Intelligent DALI

Compatible with **NormaLINK** 

Maintained / Non-maintained MULTILED


IP
20

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
XSID	White	DALI	–	1 h	1,6	12
XDID	White	DALI	100 lm	1 h	1,7	12
XSID3	White	DALI	–	3 h	1,6	12
XDID3	White	DALI	60 lm	3 h	1,7	12

Intelligent
Wireless

Maintained / Non-maintained MULTILED


IP
20

	FINISHING	COM.	LUMEN OUTPUT	AUTONOMY		PACKAGING
XSID-R	White	DALI	–	1 h	1,6	12
XDID-R	White	DALI	100 lm	1 h	1,6	12
XSID3-R	White	DALI	–	3 h	1,6	12
XDID3-R	White	DALI	60 lm	3 h	1,7	12

Central Battery
System

Maintained MULTILED

IP
20

	FINISHING	POWER SUPPLY	LUMEN OUTPUT	CONSUMPTION	CURRENT		PACKAGING
XS-S	White	230 Vca	–	2,3 W	0,017 A	0,4	12
XD-S	White	230 Vca	100 lm	2,8 W	0,017 A	1,1	12
C24 XD-S24	White	24 Vcc	100 lm	2,2 W	0,092 A	1,1	12
C24 XS-S24	White	24 Vcc	–	1 W	0,042 A	1,1	12
C24i XDI-S24	White	24 Vcc	100 lm	2,4 W	0,100 A	1,1	12
C24i XSI-S24	White	24 Vcc	–	2,4 W	0,100 A	1,1	12


Each fitting includes:

- An XS or XD fitting
- A suspension kit (2 meters).
- Four pictograms (2 PEX-A, 1 PEX-SU, 1 PEX-SD and 1 PEX-W).

Extraline Accessories


Brackets

- X-SBF** Accessory for paralel to the wall mounting
- X-SBL** Accessory for perpendicular to the wall mounting

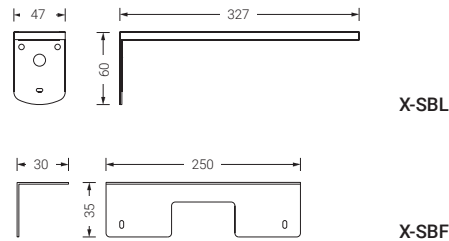

Recession frames

- X-ME** Metallic recession frame to install EXTRALINE series fittings into the ceiling (recessed)

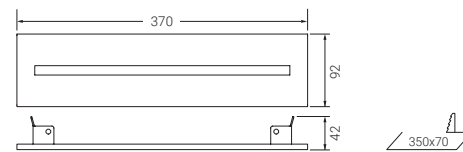

Remote controls

- S-TE** Remote control for up to 300 fittings standard or autotest

Pictograms

- Type PEX** Non adhesive pictogram 300x150 mm. *References according to table below*

Type PEX 300 x 150 mm



Maximum viewing distance
(according to EN1838 for
internally illuminated signs)

30 m



Please check for other pictograms