

Signal



SIGNAL is a range of highly versatile signalling equipment. Manufactured from polycarbonate with a methacrylate banner, they provide visibility of up to 30 m. Suitable for a variety of mounting configurations.


Exit signs

Versions

Signal surface
Signal track-mounted

 VIEWING DISTANCE = 30 m

Diffusers



Control options



Finish

RAL9016

RAL9005

Customization

Finish
Remote control





Signal, designed for fast installation

Developed to optimise installation processes, Signal combines flexible mounting options with simplified internal access, streamlining both installation and maintenance while helping reduce servicing times.



VIEWING DISTANCE

30 m.









Direct wall and surface mounting

Designed to streamline installation, Signal supports direct wall and surface mounting without additional accessories, reducing complexity and improving efficiency on site.

Flexible accessory range


Dedicated accessories expand the installation possibilities of Signal, enabling recessed, suspended and other mounting configurations to suit a wide variety of architectural environments.

-  Surface
-  Wall-mounted parallel
-  Wall-mounted perpendicular
-  Recessed
-  Suspended
-  Track mounted

Designed to integrate

Polycarbonate housing and methacrylate screen available in white (RAL9016) and black (RAL9005) finishes.

Exit signs

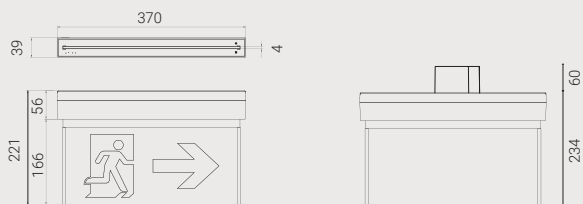

Surface

Track-mounted

| | | |
|---------------------------------|--|-------------------------------------|
| Duration | 1/3 h | 1/3 h |
| Operating modes | Maintained Non-maintained | Maintained |
| CCT | 5700 | 5700 |
| Versions | Standard Autotest DALI Central Battery System | Standard Autotest |
| Battery | Ni-MH Ni-Cd | Ni-MH Ni-Cd |
| Charging | Max. 24 h | Max. 24 h |
| IP | 20 | 20 |
| IK | 04 | 04 |
| Power supply | 230 Vac / 24 Vdc | 230 Vac / 24 Vdc |
| Mounting options | Surface Wall-mounted parallel Wall-mounted perpendicular* Recessed* Suspended* | Track-mounted |
| Standards | EN IEC 60598-2-22 EN IEC 60598-1 | EN IEC 60598-2-22 EN IEC 60598-1 |
| Viewing distance EN ISO 1838 | 30 m | 30 m |



* Using an accessory

Each fitting includes:

- + 1 fitting
- + 1 diffuser blade
- + 4 pictograms (2 left, 1 down, 1 white)

Finishes

- White
- Black



Signal



Surface

IP
20

● Black Add "-4" to the reference.

Standard

NON-MAINTAINED

| REF. | | | |
|------|---|-----|---|
| SNE | ○ | 1 h | 8 |
| SNE3 | ○ | 3 h | 8 |

MAINTAINED

| REF. | | | |
|------|---|-----|---|
| SN | ○ | 1 h | 8 |
| SN3 | ○ | 3 h | 8 |

Autotest

| REF. | | | |
|-------|---|-----|---|
| SNEA | ○ | 1 h | 8 |
| SNEA3 | ○ | 3 h | 8 |

| REF. | | | |
|------|---|-----|---|
| SNA | ○ | 1 h | 8 |
| SNA3 | ○ | 3 h | 8 |

DALI

| REF. | | | |
|--------|---|-----|---|
| SNEID | ○ | 1 h | 8 |
| SNEID3 | ○ | 3 h | 8 |

| REF. | | | |
|-------|---|-----|---|
| SNID | ○ | 1 h | 8 |
| SNID3 | ○ | 3 h | 8 |

Central Battery
System

MAINTAINED

| | REF. | | POWER SUPPLY | COMSUMPTION | CURRENT | |
|------------------|---------|---|--------------|-------------|---------|---|
| Standard C24 | SN-S24 | ○ | 24 Vcc | 1,7 W | 1,700 A | 8 |
| Addressable C24i | SNI-S24 | ○ | 24 Vcc | 2,4 W | 2,400 A | 8 |
| 230V | SN-S | ○ | 230 Vca | 1,8 W | 1,800 A | 8 |



Signal



Track-mounted



IP 20

● Black Add "-4" to the reference.

Standard

NON-MAINTAINED

| | | | | |
|-------|---|-------|-----|---|
| REF. | | LUMEN | | |
| SN-KD | ○ | - | 1 h | 8 |

Autotest

MAINTAINED

| | | | | |
|---------|---|-------|-----|---|
| REF. | | LUMEN | | |
| SNA3-KD | ○ | - | 3 h | 8 |

Accessories

● Black Add "-4" to the reference.

| | | | | |
|-----------------------------|---------------------------------|--|--|--------------|
| Pictograms | Type PSN | Pictogram 347 × 150 mm. <i>References according to table below</i> | | |
| | Type PSN 347 × 150 mm | REF. PSN-A | REF. PSN-A | REF. PSN-NSD |
| | | REF. PSN-NSU | Maximum viewing distance (according to EN ISO 1838 for internally illuminated signs) 30 m | |
| | | REF. | | |
| Recession frames | SN-ME | Recession frame | | |
| | | | | |
| Tilting wall bracket | SN-BP | Accessory for parallel or perpendicular wall installation | | |
| Suspended | SNKS-C | Ceiling suspension accessory, 100 mm long | | |
| | SNKS-30 | Ceiling suspension accessory, 300 mm long | | |
| | SNKS-100 | Ceiling suspension accessory, 1000 mm long | | |
| | SNKS-F | Adjustable ceiling suspension accessory | | |

PLEASE CHECK FOR OTHER PICTOGRAMS

Normagrup Technology Headquarters
Parque Tecnológico de Asturias. C/Ablanal, 1
33428 Llanera (Asturias), Spain

Normagrup UK
Normagrup Netherlands
Normagrup France



normagrup.com



Specifications subject to updates or modifications.



Normagrup